

TERMINATEL 258 THE WHOLE WORLD ON EVERY DESK

► UNIVERSAL OPENING

The international Videotex Communication

First and foremost, Terminatel 258 is a universal videotex terminal providing access to thousands of professional databases in all the countries using Prestel, BTX (optional) and Teletel standards.

ASCII 40 and 80 column communication

Terminatel 258 is also a TTY data processing terminal providing communication with any computer in the ASCII 40 and 80 column mode.

Integrated modem

Terminatel 258 has a V23 1200/75 bauds internal reversible modem which can be directly connected to a telephone network.

Peri-processing connector

In addition, this terminal has a Teletel peri-processing connector for connection to many peripherals such as printers, magnetic card readers, etc.

Terminatel 258: the universal Terminal.

► AN INCREASED EFFICIENCY

Terminatel 258 is the new professional version of the Minitel; more than 4 million units of it have already been sold all over the world.

Henceforward, this unit features a directory of 6 telematic numbers associated with an automatic dialling feature. It enables fast access to databases and hosts without the backing up of a telephone set.

Terminatel 258: faster and cheaper communications.

► A NEW LOOK

With its new and seductive look, Terminatel 258 fits easily into office, all the more so that there is no need to place it alongside a telephone set.

Compact and light (5 kg), Terminatel 258 can be moved around easily as the need arises.

Terminatel 258: greater freedom.

► SAFETY BY 4-CHARACTER CODE

Terminatel 258 offers total safety by 4-digit or character code. This code can be used to prohibit access to the directory and to lock the equipment entirely.

Terminatel 258: absolute security.

► A WELL KNOWN TOOL

In addition, Terminatel 258 offers all the well known functional features of Minitel together with its user-friendliness. Therefore, it can be incorporated instantly into any organization.

Terminatel 258: fits yours habits.



S U C C E S S O N T H E L I N E

TERMINATEL 258 :
MAIN TECHNICAL CHARACTERISTICS

► **MODES**

- VIDEOTEX : Prestel, BTX (option), Teletel (Minitel) 40 columns
- MIXED : Videotex protocol (function keys, etc.) and ASCII 80-column display (ISO 6429)
- TELEPROCESSING : ASCII 40 or 80-column display (ISO 6429)

► **SCREEN**

- 9 inches (23 cm)
- Monochrome
- 7 levels of grey
- Adjustable brightness.

► **DISPLAY**

- 25 lines of 40 or 80 columns
- Character resolution :
 - 7 lines of 5 pixels within a 10 by 8 pixel matrix in 40-column mode
 - 7 lines of 5 pixels within a 10 by 6 pixel matrix in 80-column mode
- Page or scrolling mode.

► **KEYBOARD**

- 65-key QWERTY keyboard with magnetic recall keys
- ASCII cursor control keys : VT, HT, BS, LF, RS (or ISO compatible)
- 9 videotex function keys : Next, Previous, Send...
- Data processing keys : Control, Escape, Function and cursor control keys
- 4 editor keys : insert and delete character or line

- Special function key for programming parameters (peripheral transmission speed, 40 or 80 characters optional mode, scrolling or page mode, screen hardcopy, etc.).

► **CHARACTER SET**

- Videotex (alpha-mosaic) and US-ASCII

► **COMMUNICATION**

- Built-in 1200/75 full duplex modem (CCITT V23 type), reversible with the possibility of activating the error correction procedure
- Directory and automatic dialer for 6x32-character numbers with 4-character password
- Terminal identification by server (8 characters)
- Full duplex peripheral connector. Speeds : 300, 1200, 2400 and 4800 Bauds.

► **POWER SUPPLY**

- 240 Volts $\pm 10\%$, 50Hz - 40W.

► **ENVIRONMENT**

- Operating temperature range : +5°C to 40°C
- Storage temperature : -30°C to 70°C
- Relative humidity : 5% to 85% condensation-free.

► **OVERALL DIMENSIONS**

- Width : 9,84 inches (25 cm)
- Height : 8,66 inches (22 cm)
- Depth : 10,24 inches (26 cm)
- Weight : 5 kg.


YOUR INSTALLATION CONSULTANT

All the above mentioned services are given only as an indication. They can require additional optional materials. For further information, please contact your installation consultant. We reserve the right to alter the technical characteristics of our equipment in order to improve quality or meet administrative specifications.

S U C C E S S O N T H E L I N E



TERMINATEL 258

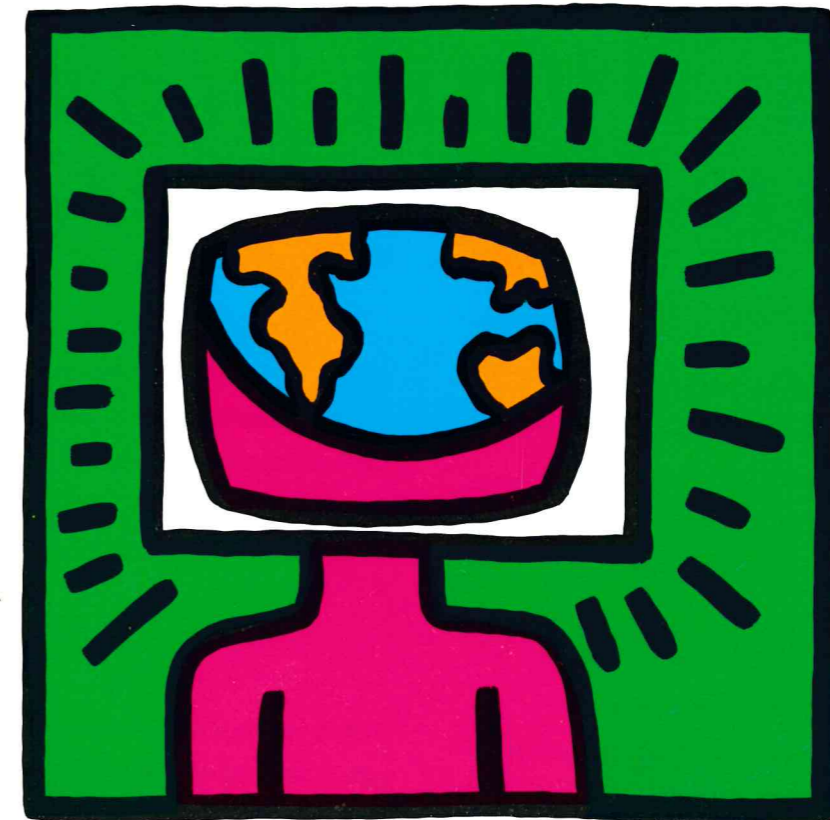

OK-Ham

THE UNIVERSAL
TERMINAL

Ogilvy & Mather - RC Siren B602 033 185 C732 GB 289 ©K-Ham 88

